





OFFICE LIGHTING SERIES

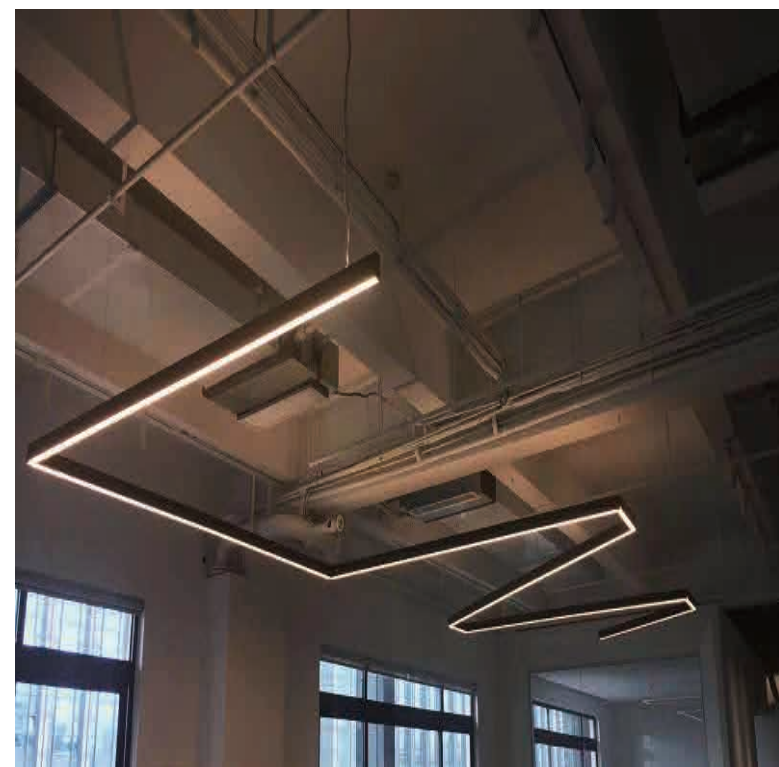


APA600040 APA600040-1 APA600040-2 APA300024 APA300048 APA600072

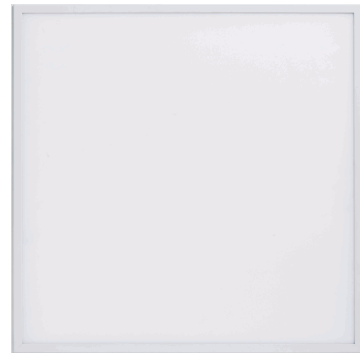


Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
White




ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXB
APA600040	3200lm	40W	220-240V	120°	3000K-6000K	600X600mm 605X605mm 625X625mm
APA600040-1	4000lm	40W	220-240V	120°	3000K-6000K	600X600mm 605X605mm 625X625mm
APA600040-2 COLOR CHANGE	3200lm	40W	220-240V	120°	3000K 4000K 5000K	600X600mm 605X605mm 625X625mm
APA300024	1920lm	24W	220-240V	120°	3000K-6000K	300X600mm
APA300048	3840lm	48W	220-240V	120°	3000K-6000K	300X1200mm
APA600072	5760lm	72W	220-240V	120°	3000K-6000K	600X1200mm

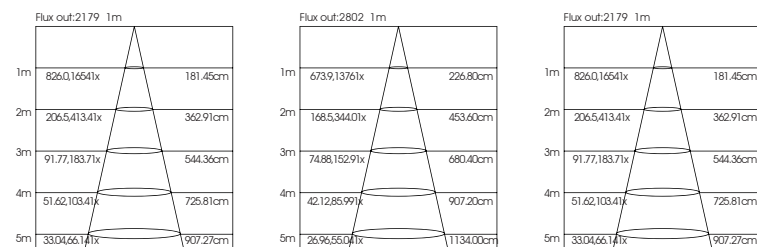


APB300030 APB600040 APB600040-1 APB120040

APB120072 APB120096 APB120040-1

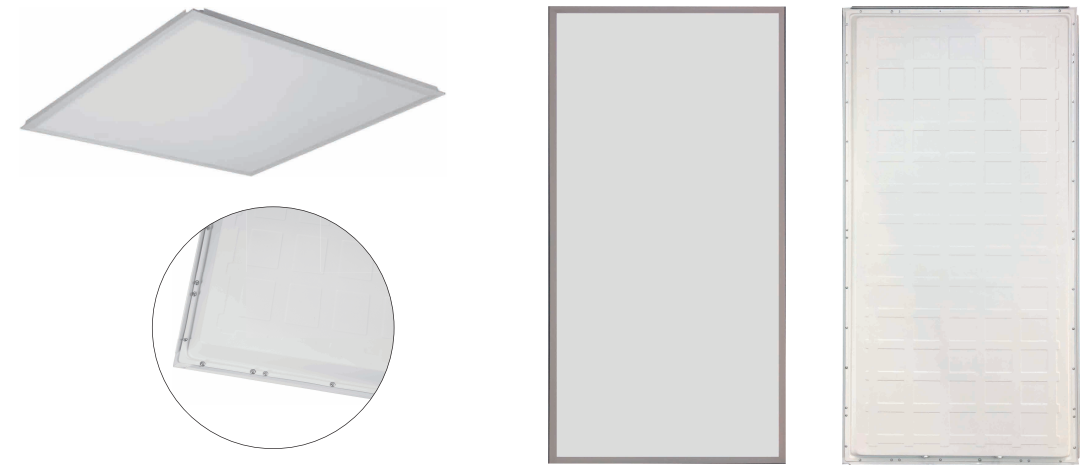


Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
White

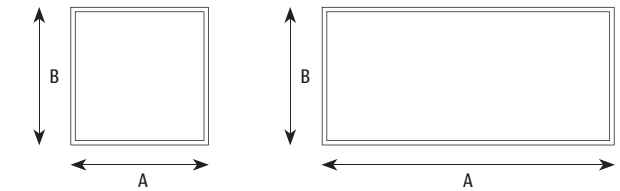

ITEM NO	LUMEN OUTPUT (Lm)	WATTAGE (w)	VOLTAGE (V)	ANGLE (°)	CCT (K)	SIZE(MM) AXB
APB300030	3000lm	30W	220-240V	120°	3000K-6000K	300X600mm
APB600040	4000lm	40W	220-240V	120°	3000K-6000K	595X595mm 600X600mm 605X605mm
APB600040-1 COLOR CHANGE	4000lm	40W	220-240V	120°	3000K 4000K 5000K	595X595mm 600X600mm 605X605mm
APB120040	4000lm	40W	220-240V	120°	3000K-6000K	1195X295mm 1200X300mm 1205X300mm
APB120072	7200lm	72W	220-240V	120°	3000K-6000K	1195X295mm 1200X300mm 1205X300mm
APB120096	9600lm	96W	220-240V	120°	3000K-6000K	1195X595mm 1200X600mm 1205X605mm
APB120040-1 COLOR CHANGE	4000lm	40W	220-240V	120°	3000K 4000K 5000K	1195X295mm 1200X300mm 1205X300mm

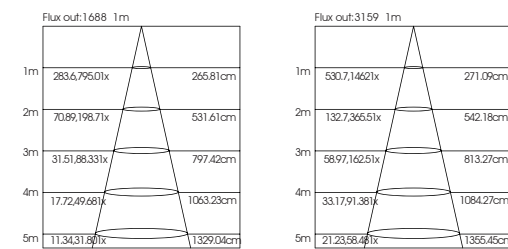

APD120024 APD120036 APD120036-1 APD120048


Option Function

- 1 Hand wave change CCT
- 2 Hand wave up and down light on/off





Application:
hotels, office, conference room, museums, restaurants, etc.


Option:
Black/White/Silver

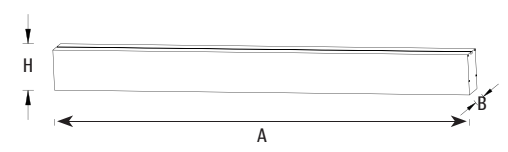

ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
APD120024	2160lm	24W	220-240V	100°	3000K-6000K	1200X35X70mm
APD120036	2880lm	36W	220-240V	100°	3000K-6000K	1200X50X70mm
APD120036-1	UP 840LM/DOWN 2800LM/ UP+DOWN 1820LM	UP12W/DOWN 40W/ UP+DOWN 26W	220-240V	100°	3000K-6000K	1200X50X70mm
APD120036-2	2520lm	36W	220-240V	100°	3000K-4000K-6000K	1200X50X70mm
APD120048	3840lm	48W	220-240V	100°	3000K-6000K	1200X50X70mm

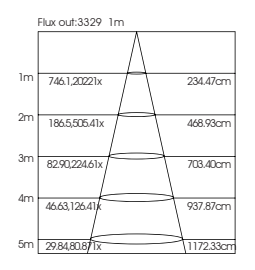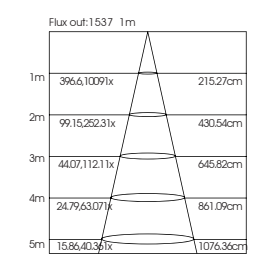


APF120036 APF120048 APF120060



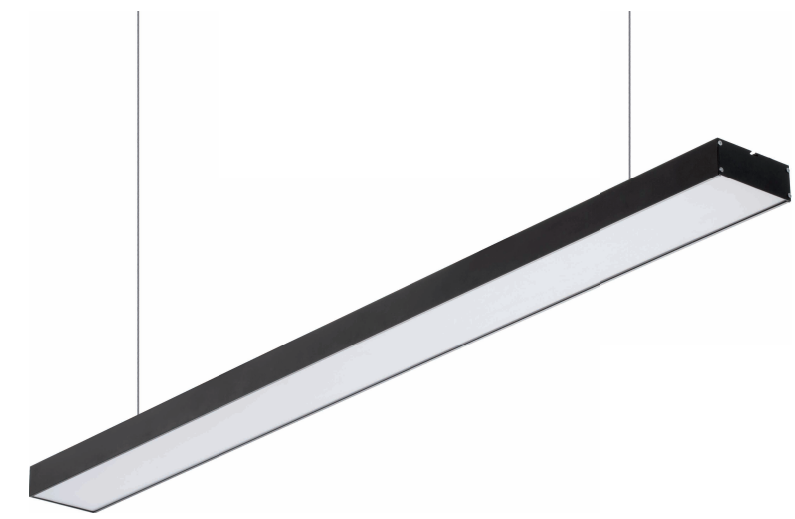


Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
Black/Silver

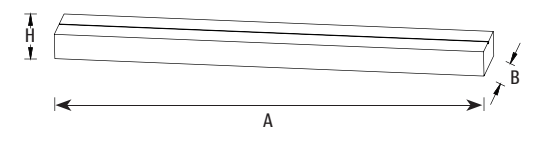


ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
APF120036	2880lm	36W	220-240V	100°	3000K-6000K	1200X70X40mm
APF120048	3840lm	48W	220-240V	100°	3000K-6000K	1200X100X40mm
APF120060	4800lm	60W	220-240V	100°	3000K-6000K	1200X150X40mm

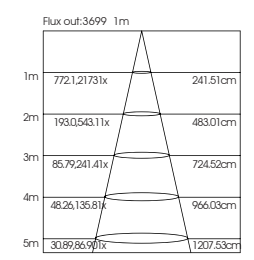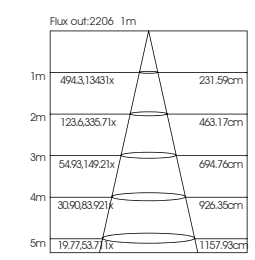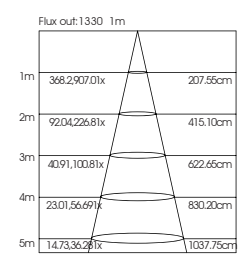

AOG119730

SLIM LINEAR INSERT

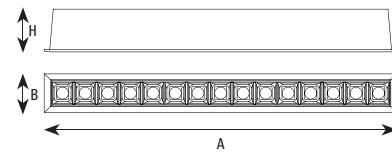

Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
Black/White


ITEM NO	Lumen output (Lm)	WATTAGE (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH	Cut Whole Size (MM)
AOG119730	2400lm	30W	220-240V	24°/36°/110°	3000k-6000k	1204X33X25mm	1197X27

Flux out:1778 1m

1m	277.69024lx	277.92cm
2m	69.392256lx	555.84cm
3m	30.841003lx	833.76cm
4m	17.355640lx	1111.68cm
5m	11.103609lx	1389.60cm
6m	7.7102507lx	1667.52cm
7m	5.6641842lx	1945.44cm
8m	4.3371410lx	2223.36cm
9m	3.4271114lx	2501.28cm
10m	2.7769024lx	2779.20cm

AOH119730

SLIM LINEAR PENDANT & SURFACE MOUNTING & TRACK SYSTEM

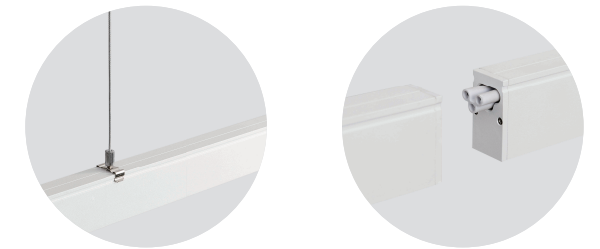

Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
Black/White

ITEM NO	Lumen output (Lm)	WATTAGE (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
AOH119730	2400lm	30W	220-240V	24°/36°/110°	3000k-6000k	1196X23X42mm

Flux out:1778 1m


1m	277.69024lx	277.92cm
2m	69.392256lx	555.84cm
3m	30.841003lx	833.76cm
4m	17.355640lx	1111.68cm
5m	11.103609lx	1389.60cm
6m	7.7102507lx	1667.52cm
7m	5.6641842lx	1945.44cm
8m	4.3371410lx	2223.36cm
9m	3.4271114lx	2501.28cm
10m	2.7769024lx	2779.20cm



OPTION ACCESSORY TRACK USING




SURFACE MOUNTING USING

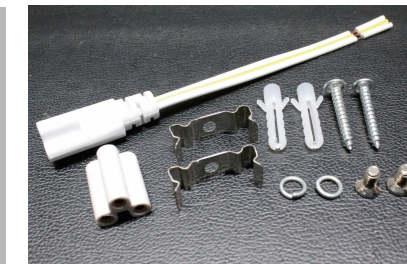

PENDANT USING



AOH1190040

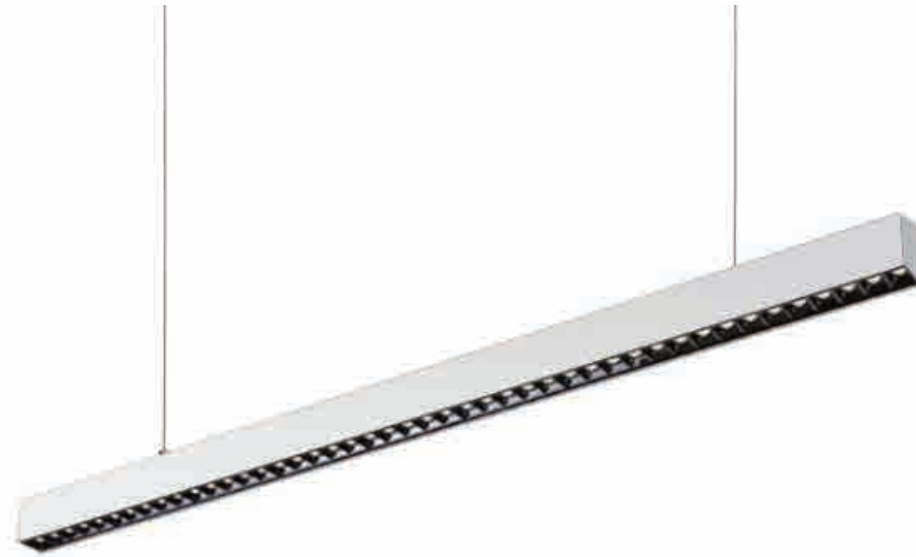

Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
Black/White

ITEM NO	Lumen output (Lm)	WATTAGE (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
AOH1190040	3200lm	40W	220-240V	24°/36°/110°	3000k-6000k	1190X35X70mm

AOH120048



Application:
hotels, office, conference room, museums, restaurants, etc.

Option:
Black/White


ITEM NO	Lumen output (Lm)	WATTAGE (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
AOH120048	3840lm	10W+28W+10W	220-240V	24°/36°/110°	3000k-6000k	1200X35X70mm



TRI600018 TRI120036 TRI150048


LED TRI-PROOF LUMINAIRES
TWO CONNECTION MODES

1. Seamless connection
2. The line connection

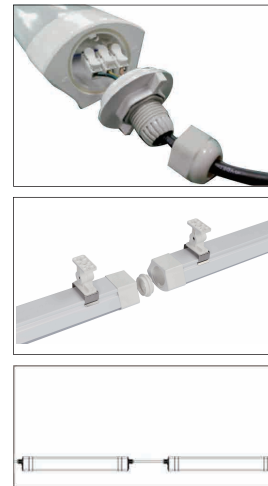

Application: Train station, Airport, etc.
Replace fluorescent batten.
Industrial Lighting: Factory, Warehouse, etc.
Commercial Lighting: Office, Supermarket, etc.
Public Lighting: Residence, Hospital, School, Metro station

Option:
White

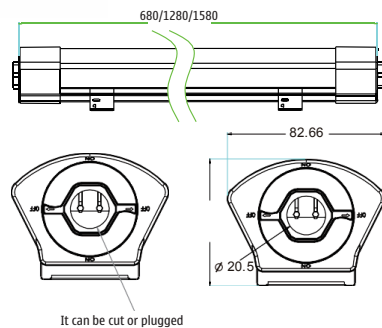

It can be cut or plugged

ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
TRI600018	1800lm	18W	220-240V	120°	3000K-6000K	680X80X58mm
TRI120036	3600lm	36W	220-240V	120°	3000K-6000K	1280X80X58mm
TRI150048	4800lm	48W	220-240V	120°	3000K-6000K	1580X80X58mm

5.8GHz Microwave-Sensor

•0-10V Dimming with 5.8GHz microwave motion sensor

Sensor Model:

Normal brightness 100%, sensor brightness 50%, Hold 5 minutes automatically turn off the light

Electrical Data

Input AC220-240V 50/60Hz
Microwave 5.8GHz±75MHz
Detection Angle Max.6m(ceiling mounting)
Mounting Height Max.14x6m(φX H)




Emergency Edition

Sensor Model:

9W 60MINUTES (FOR ALL MODELS)
9W 90MINUTES (FOR ALL MODELS)


TRI600018-1 TRI120036-1 TRI150048-1

LED TRI-PROOF LUMINAIRES

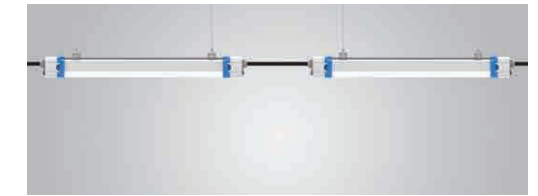

Application: Train station, Airport, etc.
Replace fluorescent batten.
Industrial Lighting: Factory, Warehouse, etc.
Commercial Lighting: Office, Supermarket, etc.
Public Lighting: Residence, Hospital, School, Metro station

Option:
White

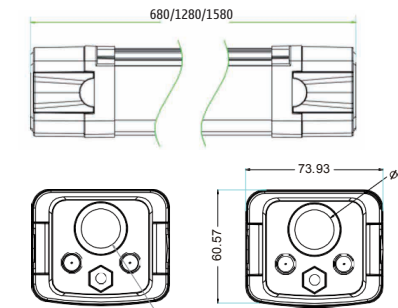

It can be cut or plugged

ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
TRI600018-1	1800lm	18W	220-240V	120°	3000K-6000K	680X74X61mm
TRI120036-1	3600lm	36W	220-240V	120°	3000K-6000K	1280X74X61mm
TRI150048-1	4800lm	48W	220-240V	120°	3000K-6000K	1580X74X61mm

5.8GHz Microwave-Sensor

•0-10V Dimming with 5.8GHz microwave motion sensor

Sensor Model:

Normal brightness 100%, sensor brightness 50%, Hold 5 minutes automatically turn off the light

Electrical Data

Input AC220-240V 50/60Hz
Microwave 5.8GHz±75MHz
Detection Angle Max.6m(ceiling mounting)
Mounting Height Max.14x6m(φX H)



Emergency Edition

Sensor Model:

9W 60MINUTES (FOR ALL MODELS)
9W 90MINUTES (FOR ALL MODELS)

TRI600018-2


TRI120036-2

TRI150048-2



Application: Train station, Airport, etc.
Replace fluorescent batten.
Industrial Lighting: Factory, Warehouse, etc.
Commercial Lighting: Office, Supermarket, etc.
Public Lighting: Residence, Hospital, School, Metro station

Option:
White



ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
TRI600018-2	1800lm	18W	220-240V	120°	3000K-6000K	680X50X45mm
TRI120036-2	3600lm	36W	220-240V	120°	3000K-6000K	1280X50X45mm
TRI150048-2	4800lm	48W	220-240V	120°	3000K-6000K	1580X50X45mm

TRI600018-3


TRI120036-3

TRI150048-3



Application: Train station, Airport, etc.
Replace fluorescent batten.
Industrial Lighting: Factory, Warehouse, etc.
Commercial Lighting: Office, Supermarket, etc.
Public Lighting: Residence, Hospital, School, Metro station

Option:
White

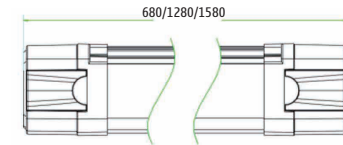

ITEM NO	Lumen output (Lm)	WATTAGE (w)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) AXBXH
TRI600018-3	1800lm	18W	220-240V	120°	3000K-6000K	680X68X53mm
TRI120036-3	3600lm	36W	220-240V	120°	3000K-6000K	1280X68X53mm
TRI150048-3	4800lm	48W	220-240V	120°	3000K-6000K	1580X68X53mm

